



VALVES INSTRUMENTS PLUS

WWW.VIP-LTD.CO.UK

Iron Valves



VIP Product Code
00/0040A

Issued 02/2026

See our Full Range online at www.vip-ltd.co.uk

VIP PN16 Semi Lugged Ductile Iron Butterfly Valve

Valve Specification

Semi-lugged ductile iron butterfly valve, suitable for PN6, PN10, PN16 & ASA150 flanges, PTFE lined EPDM seat, 316 stainless steel disc, lever operated.

Pressure / Temperature Rating

Working Pressure: 16 Bar


Working Temperature: -35°C to 150°C

Specification

- Valves comply with EN593, API 609, BS5155, ISO5211, MSS SP-67
- Replaceable rubber liner.
- Actuator-ready with top-flange to ISO5211-1.
- Flanges to EN1092-2 PN16.
- Sizes DN50 to DN150 available ex-stock, sizes up to DN600 available on request.
- Lever operated up to DN150, DN200+ gearbox operated.

Dimensions (mm)

Size	A	B	C	Ø2	ISO5211	K	E	n-Ø	HxH	W
DN50	140	80	43	12.6	F07	90	70	4-10	11X11	14
DN65	150	89	46	12.6	F07	90	70	4-10	11X11	14
DN80	158	95	46	12.6	F07	90	70	4-10	11X11	14
DN100	176	114	52	15.77	F07	90	70	4-10	11X11	14
DN125	190	127	56	18.92	F07	90	70	4-10	14X14	17
DN150	212	139	56	18.92	F07	90	70	4-10	14X14	17
DN200	236	174	60	22.10	F10	125	102	4-12	17X17	22
DN250	265	203	68	28.45	F10	125	102	4-12	22X22	22
DN300	305	242	78	31.60	F10	125	102	4-12	22X22	22

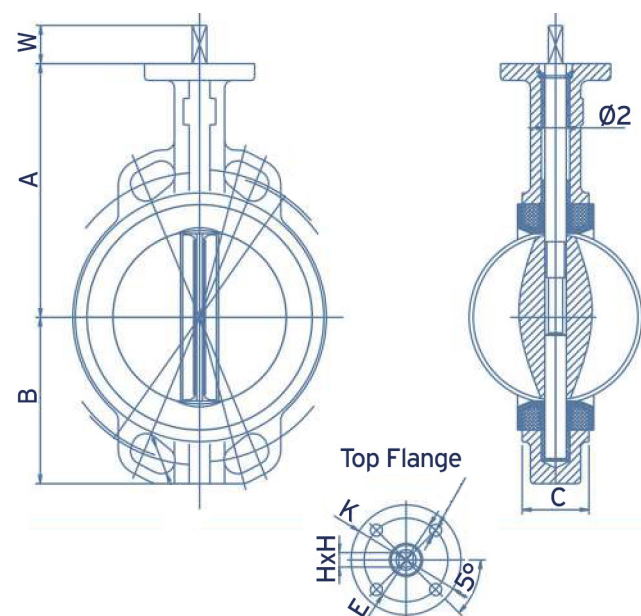

LONDON
Incorporating HEVAC Industrial
Unit 8, Hounslow Trade Park
Hounslow, TW3 3FW
T: 020 8577 7667
E: londonsales@vip-ltd.co.uk



VALUE IS PARAMOUNT

MANCHESTER
Incorporating F Ashton Ltd
VIP House, Chaddock Lane
Astley, M29 7JT
T: 01942 885 700
E: sales@vip-ltd.co.uk