




VALVES INSTRUMENTS PLUS

WWW.VIP-LTD.CO.UK

Gas Solenoids



VIP Product Code
35/0398

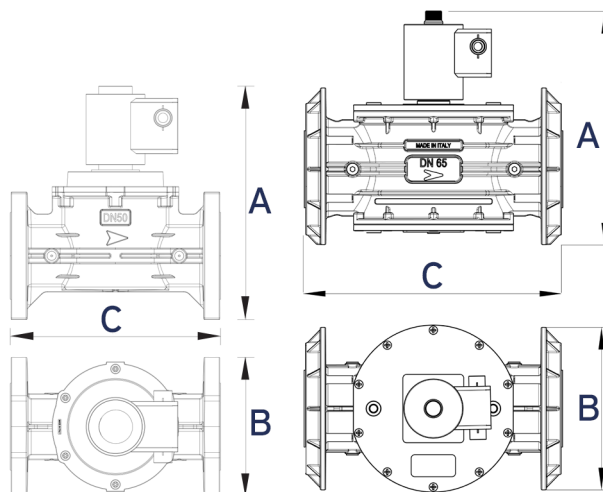

Issued 07/2026

See our Full Range online at www.vip-ltd.co.uk

PN16 Flanged Gas Solenoid, Fast Opening & Closing, 230v

Description

Automatic gas solenoid valves are used for safety and control of gas for shut-off in gas feed pipes. Suitable for various gasses, including Natural Gas, Propane & LPG. Gas solenoid valve is a normally closed solenoid that opens automatically when the coil is powered and closes automatically when there is no power.

Specification

- **Inlet Connection:** Flanged PN16
- **Opening & Closing Time:** <1 second
- **Maximum Number of Operations -**
20 per minute (DN65/80/100)
2 per minute (DN125/150)
- **Supply Voltage:** 230V (-15%+10%) 50-60Hz
(Also available from factory: 24V, 110V)
- **Working Temperature:** -20°C - 60°C
- **Complete Body Material:** Aluminium EN AC 43100
- **Use:** Non-aggressive gases, Family 1-2-3 & Air
- **Power - 230Vac**
Peak Power 400Wm (DN65/80/100) 360Wm (DN125/DN150)
Maintain Power 4W (DN65/80/100) 90W (DN125/DN150)
Coils to class F, copper wire class H
- **Test Points:** 5 connections - screw 1/4" NPT
- **Approval:** EN161
- **Protection:** IP65
- **Optional Accessories:** Closed position indicator

Dimensions (mm)

VIP Code	Size	Pmax	A	B	C
35/0398/065	2 1/2"	360 mbar	325	220	350
35/0398/080	3"	360 mbar	325	220	350
35/0398/100	4"	360 mbar	325	220	350
35/0398/125	5"	360 mbar	580	333	441.5
35/0398/150	6"	360 mbar	580	333	441.5

LONDON

Incorporating HEVAC Industrial
Unit 8, Hounslow Trade Park
Hounslow, TW3 3FW
T: 020 8577 7667
E: londonsales@vip-ltd.co.uk



VALUE IS PARAMOUNT

MANCHESTER

Incorporating F Ashton Ltd
VIP House, Chaddock Lane
Astley, M29 7JT
T: 01942 885 700
E: sales@vip-ltd.co.uk