



See our Full Range online at www.vip-ltd.co.uk

Nabic Fig 500L Pressure Relief Valve

Features & Benefits

The NABIC Fig 500L is designed primarily for use where high tightness is required on the discharge side. A sealed spring cover prevents the possibility of back pressure leakage through the top of the valve. The lift is progressively proportional to flow. All wetted parts are manufactured from dezincification resistance materials. Designed and tested to BS EN ISO 4126 -1. WRAS approved (1 bar and above).

Specification

- Size Range: DN15 - DN65
- Resilient PTFE seating design with high degree of seat tightness
- Pressure tight on discharge side
- Suitable for liquids and inert gases
- Available with Viton seat design
- Pressure setting locked and sealed
- Drain plug fitted on sizes DN32 and above

Pipe Connections

Screwed female inlet and outlet connections. Inlet and outlet connections are of equal size. Threaded connections are 'Rp' BSP parallel to BS EN 10226-1. NPT connections are available upon request.

Pipe Connections

All valves are shell and seat tested (to confirm set pressure) before leaving the factory and all valves are supplied pre-set with a tamper proof seal. Pressure Test Certificate and Letters of Conformity available on request.

Pipe Connections

All valves are shell and seat tested (to confirm set pressure) before leaving the factory and all valves are supplied pre-set with a tamper proof seal.

Pressure Ratings & Temperature Range

Min - Max Set Pressure (Bar)	Min - Max Set Temperature (°C)
0.4 to 12.5	-20 to 195



VIP Product Code
46/2500

This product can be set at our works, certified and dispatched for next day delivery.



LONDON

Incorporating HEVAC Industrial
Unit 8, Hounslow Trade Park
Hounslow, TW3 3FW
T: 020 8577 7667
E: londonsales@vip-ltd.co.uk



VALUE IS PARAMOUNT


MANCHESTER

Incorporating F Ashton Ltd
VIP House, Chaddock Lane
Astley, M29 7JT
T: 01942 885 700
E: sales@vip-ltd.co.uk



VALVES INSTRUMENTS PLUS

WWW.VIP-LTD.CO.UK

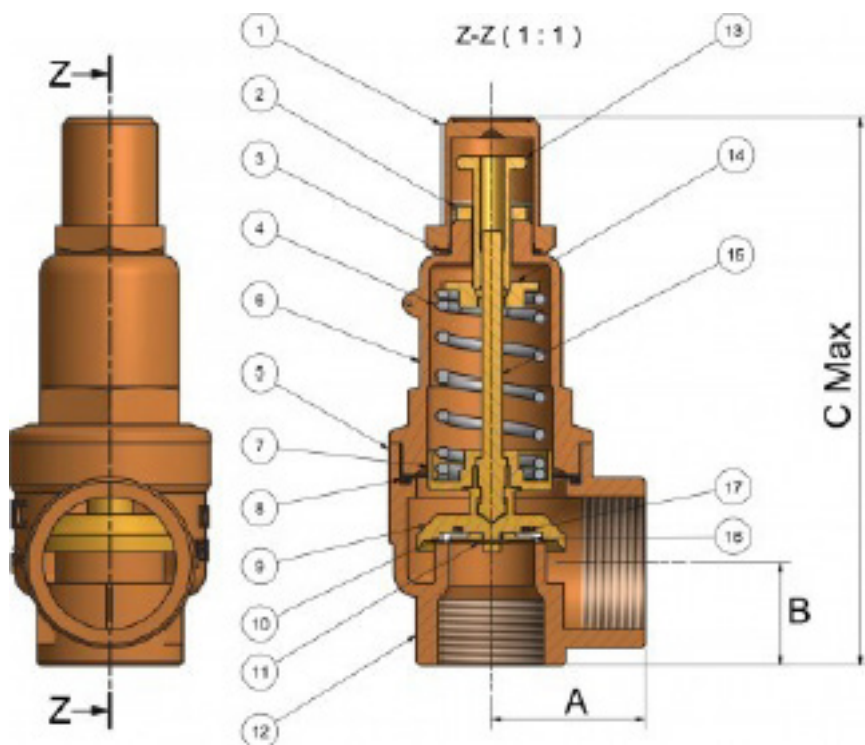

Dimensions (mm)						
DN	Rp BSP Inlet	RP BSP Outlet	A	B	C	Weight (Kg)
10	3/8"	1/2"	26	21	106	0.38
15	1/2"	3/4"	33	20	123	0.70
20	3/4"	1"	39	24	135	0.93
25	1"	1 1/4"	45	30	155	1.42
32	1 1/4"	1 1/2"	54	36	201	2.50
40	1 1/2"	2"	64	41	236	4.63
50	2"	2 1/2"	76	47	267	7.00
65	2 1/2"	3"	90	60	330	12.50

Materials of Construction		
Item	Part name	Material
1	Leak Proof Dome	Bronze, BS EN 1982 CC491K
2	Locknut	Brass, BS EN 12164 CW609N
3	Dome 'O' Ring	Viton
4	Spring	Chrome Vanadium Alloy Steel, BS 2803 735 A50 HS (Stainless Steel, BS 2056 302S26 Opt)
5	Label	Yellow kapton
6	Spring Cover	Bronze, BS EN 1982 CC491K
7	Piston	Brass, BS EN 12164 CW609N
8	Cover Seal	Viton
9	Seat Seal Holder	Bronze, BS EN 1982 CC491K / Brass BS EN 12164 CW602N (DZR)
10	Seat Seal	PTFE (Viton Opt)
11	Starlock Washer	Stainless Steel
12	Body	Bronze, BS EN 1982 CC491K
13	Adjusting Screw	Brass, BS EN 12164 CW609N
14	Spring Plate	Brass, BS EN 12164 CW609N
15	Spindle	Brass, BS EN 12164 CW721R
16	Seat Seal Retaining Plate	Bronze, BS EN 1982 CC491K / Brass BS EN 12164 CW602N (DZR)
17	O-Ring	Viton

LONDON

Incorporating HEVAC Industrial
Unit 8, Hounslow Trade Park
Hounslow, TW3 3FW
T: 020 8577 7667
E: londonsales@vip-ltd.co.uk



VALUE IS PARAMOUNT

MANCHESTER

Incorporating F Ashton Ltd
VIP House, Chaddock Lane
Astley, M29 7JT
T: 01942 885 700
E: sales@vip-ltd.co.uk



Discharge Capabilities

The discharge capacity of a safety valve must be equal to or greater than the output of the boiler or system it is protecting. To ensure that the correct method of sizing is used, reference should be made to the relevant BS specification for the design of the boiler or system. Fig 500L capacities are tabulated below to assist selection.

Air Capacity - 10% Overpressure (BS EN 4126-1)								
Set Pressure (Bar)	litres/min							
	DN10	DN15	DN20	DN25	DN32	DN40	DN50	DN65
1.0	13	25	44	69	112	176	274	464
2.0	20	38	67	105	171	268	418	707
3.0	27	51	90	141	230	360	562	950
4.0	34	64	113	177	289	452	706	1193
6.0	48	90	159	248	407	636	993	1679
8.0	62	115	205	320	525	820	1281	2165
10.0	76	141	251	392	642	1004	1568	2651
12.5	93	174	308	482	790	1235	1928	3259

Water - Unvented System - 10% Overpressure								
Set Pressure (Bar)	litres/min							
	DN10	DN15	DN20	DN25	DN32	DN40	DN50	DN65
1.0	29	54	96	151	247	386	603	1019
2.0	41	77	136	213	349	546	853	1441
3.0	51	94	167	261	428	668	1044	1765
4.0	58	109	193	302	494	772	1205	2037
6.0	71	133	236	369	605	945	1476	2496
8.0	83	154	273	426	698	1092	1705	2881
10.0	92	172	305	477	781	1220	1906	3222
12.5	103	192	341	533	873	1364	2131	3602

To convert to gals/min multiply by 0.22

LONDON

Incorporating HEVAC Industrial
Unit 8, Hounslow Trade Park
Hounslow, TW3 3FW
T: 020 8577 7667
E: londonsales@vip-ltd.co.uk



VALUE IS PARAMOUNT

MANCHESTER

Incorporating F Ashton Ltd
VIP House, Chaddock Lane
Astley, M29 7JT
T: 01942 885 700
E: sales@vip-ltd.co.uk