



VALVES INSTRUMENTS PLUS

WWW.VIP-LTD.CO.UK

Service Valves



VIP Product Code
02/0013

Issued 09/2026

See our Full Range online at www.vip-ltd.co.uk

VIP DZR Double Check Valve

Double check valves are used to prevent the risk of backflow and back siphonage contamination in domestic & commercial buildings.

Features

- Compact structure, light weight, easy to install
- Allow high flow and minimum pressure drop to provide good flow rate
- Category 3 protection for both backflow & siphonage as specified in the Water Supply (Water Fittings) Regulations 1999

Specification



- Manufactured to BSEN 13959 Standard
- **Connections:** BSP Screwed Female Ends
- **Minimum Operating Pressure:** 0.2 Bar
- **Maximum Operating Pressure:** 16 Bar
- **Maximum Temperature:** 85°C

Materials of Construction

- **Body:** DZR Brass
- **O-Ring:** EPDM
- **Check Cartridges:** POM

Dimensions (mm)

VIP Code	Size	A	B
02/0013/015	1/2"	24	64
02/0013/020	3/4"	32	78
02/0013/025	1"	38	94
02/0013/032	1 1/4"	46	121
02/0013/040/050	1 1/2"	52	143
02/0013/050	2"	65	184

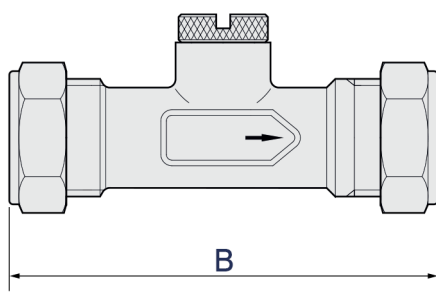

LONDON

Incorporating HEVAC Industrial
Unit 8, Hounslow Trade Park
Hounslow, TW3 3FW
T: 020 8577 7667
E: londonsales@vip-ltd.co.uk



VALUE IS PARAMOUNT

MANCHESTER

Incorporating F Ashton Ltd
VIP House, Chaddock Lane
Astley, M29 7JT
T: 01942 885 700
E: sales@vip-ltd.co.uk